



SMD系列

SMD5032 3225 2520 2016

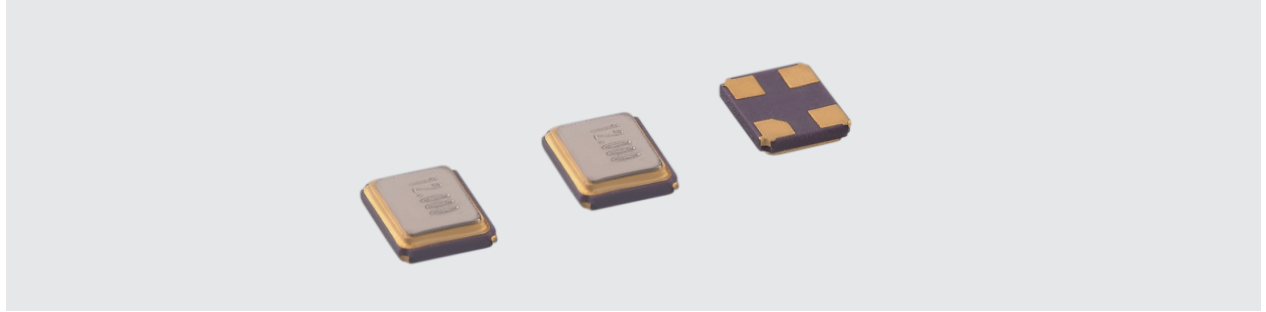

◎ 产品尺寸图 /Product dimension drawing

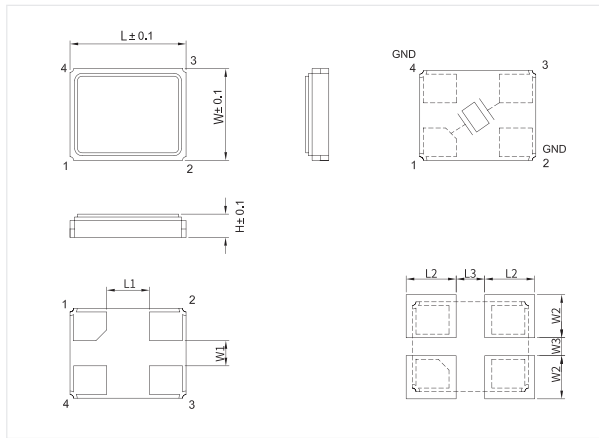

◎ 尺寸标注表 /Dimension table <unit:mm>

尺寸/ 型号	5032	3225	2520	2016
L	5.00	3.20	2.50	2.00
W	3.20	2.50	2.00	1.60
H	0.90	0.70	0.55	0.50
L1	2.40	1.20	0.90	0.70
W1	1.40	0.70	0.70	0.50
L2	1.80	1.40	1.00	0.90
L3	2.00	0.80	0.85	0.50
W2	1.30	1.20	0.90	0.80
W3	1.00	0.50	0.65	0.30

◎ 产品参数 /Product parameter

项目 Item \ 类型 Type	5032	3225	2520	2016
频率范围Frequency Range	8~60M	10~114M	12~66M	16~66M
调整频差Frequency Tolerance(at 25°C)	±10ppm, ±20ppm or specify			
温度频差 Frequency Stability Over Operating Temperature Range	±15ppm, or specify			
工作温度Operating Temperature Range	-20~+70°C, or specify			
静态电容Shunt Capacitance(C0)	3.0pF Max			
绝缘电阻Insulation Resistance(IR)	500MΩ Min 100VDC/+15VDC			
激励功率Drive Level	0.01~1000μW(10μW typical)			
负载电容Load Capacitance	12pF, 20pF or specify			
老化率Aging(at 25°C)	±3ppm/year Max			
储存温度Storage Temperature Range	-55~+125°C			
等效串联电阻 Equivalent Series Resistance(ESR)	100Ω Max / see spec			

◎ 应用范围 /applied range

